

Specific Gravity Analyzer (CS, CPVC, 316 SS)

Model: SGA-FT-CS, SGA-FT-S6, SGA-FT-CPVC

Jogler[®]

INC.


A	(CS, 316 SS, CPVC) VENT BALL VALVE, .25 INCH FNPT	W
B	(CS, 316 SS, CPVC) MOUNTING BRACKETS, TOP & BOTTOM	
C	(CS, 316 SS, CPVC) CONNECTION FLANGES, TOP & BOTTOM	W
D	(CS, 316 SS, CPVC) HOUSTING FLANGES, WITH VITON O-RING	W
E	PTFE TEFLON SUPERSEAL INSERTS <i>PATENTED</i>	W
F	3.00 INCH HW BORSILICATE SIGHT TUBING	W
G	HYDROMETER (SPECIFY RANGE)	W
H	6.00 INCH OUTER LEXAN SIGHT TUBE	
I	1.00 INCH BOROSILICATE HYDROMETER SLEEVE	W
J	(CS, 316 SS, CPVC) OVERFLOW BALL VALVE, .25 INCH FNPT	W
K	(CS, 316 SS, CPVC) INLET FLOW NEEDLE VALVE, .25 INCH FNPT	W
L	(CS, 316 SS, CPVC) MAIN DRAIN BALL VALVE, .25 INCH FNPT	W
M	(4) (CS, 316 SS, CPVC) SUPPORT RODS	

NOTES FOR NORMAL OPERATION:

1. MAIN DRAIN VALVE (L) IS CLOSED.
2. OVERFLOW VALVE (J) IS OPEN. CAN BE CLOSED FOR PROCESS SAMPLING AND READING.
3. THROTTLE (OPEN) INLET VALVE (K) FOR FLOW.
4. VENT VALVE (A) IS NORMALLY CLOSED.

W = WETTED GAGE COMPONENTS

DRAWING NOT TO SCALE AND DIMENSTIONS ARE SUBJECT TO CHANGE

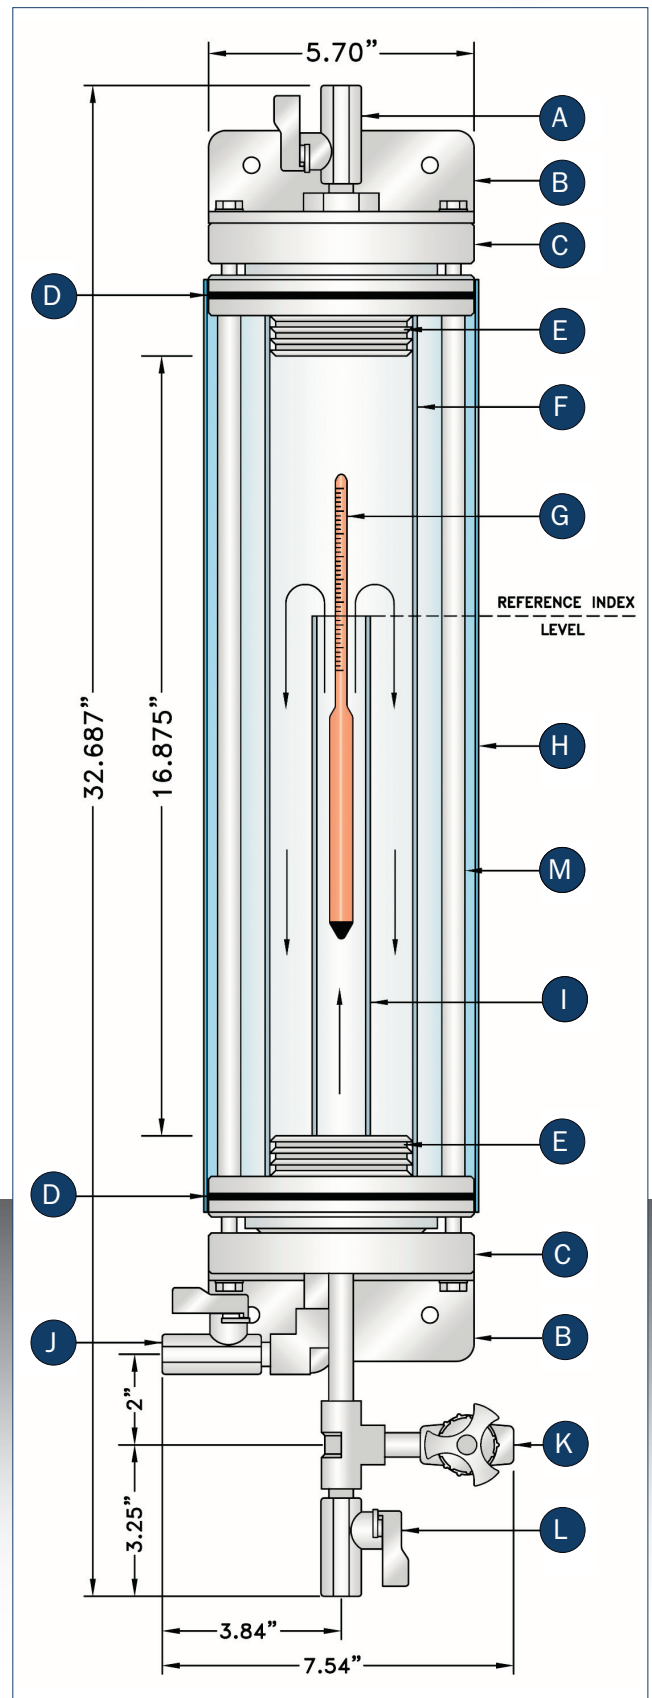

9715 Derrington Road Houston, TX 77064 USA
 Phone: 281.469.6969 Fax: 281.469.0422 Toll Free: 800.223.8469
 Web: www.Jogler.com Email: sales@Jogler.com

